

R-32 Small Inverter Chiller & Heat Pump

Packaged Version



AHUs

CHILLERS

PROJECTS

SERVICE

Daikin technology at its best

Full Inverter Technology

- › Daikin design DC-Inverter scroll compressors
- › Daikin design DC-Inverter fans
- › Inverter pump kit both Low and High Lift

Low environmental impact

R-32
refrigerant



68% Lower GWP
compared to R410A

Extended range

Cooling capacity



Heating capacity



Boost mode
reach around 100 kW!

Wide operating envelope



Hot water production
up to 60°C
for space heating or
domestic hot water

Chilled water production
down to -15°C
for brine application

down to -20°C
ambient temperature both in
cooling and heating mode for
the most critical applications

up to 52°C
ambient temperature
operation suitable for the
most extreme conditions

Achieving best performances



Top Full Load and Part Load
efficiencies for Comfort and Process applications
both in Cooling and Heating modes

- › EER up to 3.22
- › SEER up to 5.76
- › SEPR up to 8.48
- › COP up to 3.46
- › SCOP AW35 up to 4.19 **A++**
- › SCOP AW55 up to 3.02 **A+**

Multiple versions for different applications



- › Cooling Only or Heat pump versions
- › Naked, with low lift or high lift inverter pump kit as an option

Quiet operation



Down to

76 dB(A)

sound power, with the possibility of
further reduction with quiet mode
operation enabled


Enhanced Connectivity




- › User friendly control interface
- › Control by App (Next Step)
- › Daikin On Site
- › Modbus and Bacnet Communication*
- › Applications: radiators, fan coils, radiant floor, domestic hot water*

*with an additional accessory

Fast delivery to site



Large stock availability
allowing immediate
satisfaction of customer's
needs

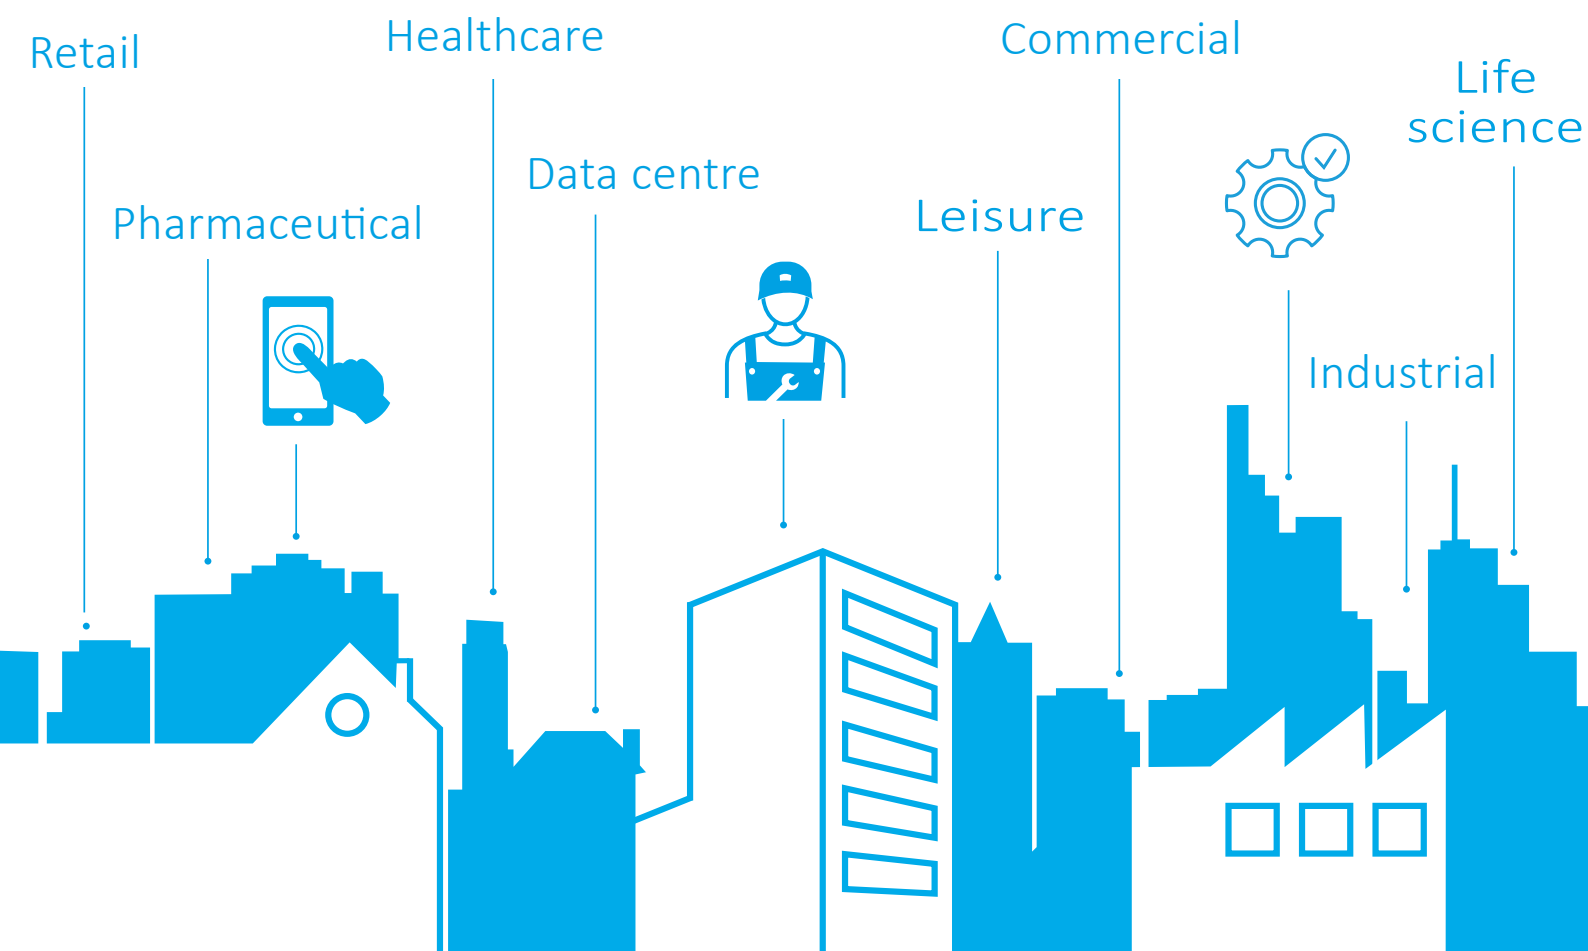

For Product, Service & Maintenance,
Rental and Spares enquiries:



0345 565 2700



www.daikinapplied.uk



www.daikinrentalsolutions.uk



Follow us:
www.linkedin.com/company/daikin-applied-uk-ltd/



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Applied (UK). Daikin Applied (UK) Ltd has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Applied (UK) Ltd explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication.



Daikin Applied (UK) Ltd is certified to ISO 9001 Quality Management System (QMS),
ISO 14001 Environmental Management System (EMS), and
ISO 45001 Occupational Health and Safety (OH&S) management systems.
For the latest certificates, visit: www.daikinapplied.uk/documents-download

Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the Eurovent Certified performance programme for Liquid Chilling Packages, Hydronic Heat Pumps and Air handling Units. Check ongoing validity of certificate: www.eurovent-certification.com

